

SEHA®
brand tyres

“Best price,
prompt delivery,
quality service”

**LIGHT TRUCK, TRACTOR,
IMPLEMENT, INDUSTRIAL,
OTR & FORKLIFT TYRES**




product catalogue

**LIGHT
TRUCK**



TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
6.50-14C	8 PR	5J , 5K	170	640	1300	2460	55
6.50-16C	8 PR	4.50 SDC , 41/2J , 41/2K	180	756	1750	3300	60
6.50-16C	10 PR	4.50 SDC , 41/2J , 41/2K	180	756	2000	3900	65
7.00-16C	8 PR	5.00 F	200	769	2000	3800	62
7.00-16C	10 PR	5.00 F	200	769	2300	4480	70
7.50-16C	8 PR	6.0G SDC, 6L	215	815	2100	3960	65
7.50-16C	10 PR	6.0G SDC, 6C	215	815	2500	4720	73
7.50-16C	12 PR	6.0, B6.0, 6.0S, 6.00T	215	815	2900	5600	94

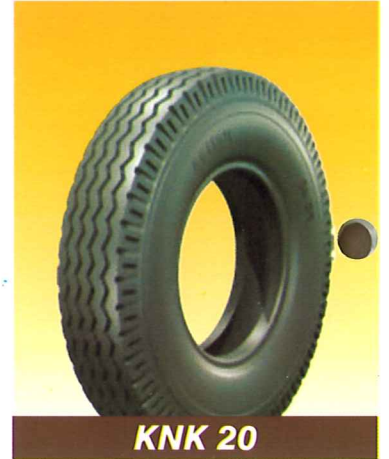

TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
7.50-16C	10 PR	6.0G SDC, 6C	215	815	2500	4720	73
7.50-16C	12 PR	6.0, B6.0, 6.0S, 6.00T	215	815	2900	5600	94





TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
7.50-16C	8 PR	6.0G SDC, 6L	215	815	2100	3960	65
7.50-16C	10 PR	6.0G SDC, 6C	215	815	2500	4720	73
7.50-16C	12 PR	6.0, B6.0, 6.0S, 6.00T	215	815	2900	5600	94



TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
7.00-16C	8 PR	5.00 F	200	769	2000	3800	62
7.00-16C	10 PR	5.00 F	200	769	2300	4480	70
7.50-16C	8 PR	6.0G SDC, 6L	215	815	2100	3960	65
7.50-16C	10 PR	6.0G SDC, 6C	215	815	2500	4720	73
7.50-16C	12 PR	6.0, B6.0, 6.0S, 6.00T	215	815	2900	5600	94

Front / Rear Tractor



KNK 50




Special design for farm tractor as rear tyre and also as front tyre and as front tyre for combined harvesters.

Tread pattern provides very good tracking on the field and also self-cleaning ability.

The thick lug with special compound provides improved tyre mileage and uniform wear.

**FRONT / REAR
TRACTOR**

KNK 50



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
4.50-10	4 PR	3.00 D	124	490	300	30
5.00-12	4 PR	3.50 D	145	567	375	34
6.50/80-12	6 PR	4.50 E	163	569	420	35
6.50/80-13	6 PR	4.50 E	163	587	460	35
7.00-12	6 PR	5.00 F	200	683	487	36
5.00-15	6 PR	3.50 D	145	644	365	51
6.00-16	6 PR	4.00 E	165	735	560	48
6.00-16	8 PR	4.00 E	165	740	590	48
6.50-16	6 PR	4.50 E	175	760	615	45
7.50-16	8 PR	5.50 F	205	805	875	54
7.00-18	8 PR	5.00 F	200	836	875	48
7.50-18	8 PR	5.50 F	205	860	950	54
7.50-20	8 PR	5.50 F	205	925	1030	49
8.3/24	8 PR	W6	211	995	990	46
9.5-24	8 PR	W7	241	1050	1110	41
11.2/24	8 PR	W9	284	1105	1225	35
12.4/24	8 PR	W9,DW9,W10,DW10	315	1160	1415	33
12.4/24	12 PR	W9,DW9,W10,DW10	315	1160	1820	35
13.6/24	8 PR	W11	345	1190	1550	29
14.9/24	8 PR	W12, W11	378	1265	1760	26
14.9/24	10 PR	W12, W11	378	1265	1990	33
11.2/28	6 PR	W9	284	1205	1305	35
11.2/28	8 PR	W9	284	1205	1305	35
12.4/28	6 PR	W9, W10, DW10	315	1260	1275	25
12.4/28	8 PR	W9, W10, DW10	315	1260	1510	33
13.6/28	6 PR	W11, DW11	345	1310	1430	23
13.6/28	8 PR	W11, DW11	345	1310	1645	29
14.9/28	6 PR	W11, DW11, W12, DW12	378	1365	1610	20
14.9/28	8 PR	W11, DW11, W12, DW12	378	1365	1880	26
16.9/28	8 PR	W14L, DW14, DW15	428	1435	2175	25
16.9/28	10 PR	W14L, DW14, DW15	428	1435	2380	25
14.9/30	8 PR	W11, W12	378	1415	1940	26
14.9/30	10 PR	W11, W12	378	1415	2190	33
16.9/30	8 PR	W14L, DW14, DW15	429	1485	2245	24
16.9/30	10 PR	W14L, DW14, DW15	429	1485	2455	29
16.9/30	12 PR	W14L, DW14, DW15	429	1485	2680	32
16.9/30	14 PR	W14L, DW14, DW15	429	1485	2920	34
18.4/30	8 PR	W15L, DW15, DW16	467	1550	2415	20
18.4/30	10 PR	W15L, DW15, DW16	467	1550	2815	26
18.4/30	14 PR	W15L, DW15, DW16	467	1550	3200	32
16.9/34	8 PR	W14L	429	1585	2430	25
16.9/34	10 PR	W14L	429	1585	2650	29
16.9/34	12 PR	W14L	429	1585	2870	35
18.4/34	8 PR	W15L	467	1650	2565	20
18.4/34	10 PR	W15L	467	1650	2990	26
18.4/34	12 PR	W15L	467	1650	3375	33
12.4/36	8 PR	W9, W10, DW10	315	1465	1700	33
13.6/36	6 PR	W11, DW11	345	1515	1615	23
13.6/36	8 PR	W11, DW11	345	1515	1855	29
13.6/36	8 PR	W11, DW11	345	1565	1950	29
14.0/38	8 PR	W11, DW11	375	1580	2060	26
14.0/38	10 PR	W11, DW11	375	1580	2300	33
15.5/38	8 PR	-	394	1570	2060	26
15.5/38	10 PR	-	394	1570	2360	33
16.9/38	8 PR	W14L, DW14, DW15	429	1685	2520	25
16.9/38	10 PR	W14L, DW14, DW15	429	1685	2760	29
18.4/38	10 PR	W15L	467	1750	3150	26



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
6.00-16	6 PR	4.00 E	165	735	560	48
6.00-16	8 PR	4.00 E	165	735	610	48
6.50-16	6 PR	4.50 E	175	760	615	48
6.50-16	8 PR	4.50 E	175	760	735	60
7.50-16	6 PR	5.50 F	205	805	750	40
7.50-16	8 PR	5.50 F	205	805	875	54



KNK 30



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
5.50-16	6 PR	4.00 E	150	710	530	54
6.00-16	6 PR	4.00 E	165	735	560	48
7.50-16	6 PR	5.50 F	205	805	750	41
7.50-16	8 PR	5.50 F	205	805	870	54
7.50-18	8 PR	5.50 F	205	860	950	54



KNK 35



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
6.50-20	8 PR	5.00 F	175	865	1000	54
7.50-16	6 PR	5.50 F	205	805	750	48
7.50-16	8 PR	5.50 F	205	805	870	54
7.50-20	8 PR	5.50 F	205	925	1030	49



KNK 32



KNK 25

TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
7.50-16C	10 PR	5.50 F	215	815	2500	4720	73
7.50-16C	12 PR	5.50 F	215	815	2900	5600	94
8.25-20C	14 PR	6.00 F	229	934	4120	7950	90



KNK 26

TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
9.00-16C	12 PR	6.00 F	252	900	3260	6083	73
9.00-16C	14 PR	6.00 F	252	900	3540	6623	82



KNK 27

TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
9.00-16C	12 PR	6.00 F	252	900	3260	6083	73
9.00-16C	14 PR	6.00 F	252	900	3540	6623	82



KNK 48

TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
10.0/75-15.3 TL	12 PR	9.00	264	760	1695	68
11.5/80-15.3 TL	12 PR	9.00	290	845	2145	59
12.5/80-15.3 TL	12 PR	9.00	307	889	2380	54
10.5/65-16 TT	10 PR	W9	274	755	1360	55
10.5/80-18 TT	10 PR	W9	274	907	1950	54
12.5/80-18 TT	14 PR	W9	308	965	3000	63
13.0/65-18 TT	14 PR	W11	336	890	2575	63
13.0/65-18 TT	16 PR	W11	336	890	2800	68



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
12.5/80-18 TL-TT	12 PR	W9	285	955	2625	54
16.0/70-20 TL-TT	14 PR	13	418	1075	3750	51
15.5-80-24 TL-TT	14 PR	12.00	394	1240	4500	51
16.0/70-24 TL-TT	14 PR	13	407	1178	3550	51
16.9/24 TL-TT	12 PR	W15L	429	1310	3250	38
15.5-25 TL-TT	12 PR	12.00	394	1277	3250	36
18.4/26 TL-TT	14 PR	W16	467	1375	4250	42
16.9/28 TL-TT	12 PR	P15	429	1410	3465	36



TECHNICAL DATA			Inflated Dimensions		Loading Capacity		
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Two Wheel Axle (kg)	Four Wheel Axle (kg)	Inflating Pressure (psi)
10.00-20	16 PR	7.50	215	925	2800	5140	62



TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
10-16.5 TL	8 PR	8.25	264	773	1950	55
12-16.5 TL	10 PR	9.75	307	831	2650	68





KNK 70

TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
17.5-25 TL	16 PR	14.00/1.5, 14.00/1.5 SDC	445	1348	3650	44
17.5-25 TL	20 PR	14.00/1.5, 14.00/1.5 SDC	445	1348	4125	58
20.5-25 TL	16 PR	17.00/2.0	520	1492	4250	40
20.5-25 TL	20 PR	17.00/2.0	520	1492	4875	48
23.5-25 TL	16 PR	19.50/2.5	597	1617	5150	40
23.5-25 TL	20 PR	19.50/2.5	597	1617	5450	51
26.5-25 TL	28 PR	22.00/3.0	673	1750	10000	51
29.5-25 TL	28 PR	24.00/3.0	750	1921	17500	62



KNK 72

TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
13.00-24 TT-TL	12 PR	8.00 TG	333	1278	2725	40
13.00-24 TT-TL	14 PR	8.00 TG	333	1278	3150	51
14.00-24 TT-TL	16 PR	10.00 VA	362	1348	3650	54
14.00-24 TT-TL	18 PR	10.00 VA	362	1348	4000	62



IND 40

TECHNICAL DATA			Inflated Dimensions		Loading Capacity	
Size	Ply Rating	Recommended Rim Size	Section Width (mm)	Diameter (mm)	Per Tyre (kg)	Inflating Pressure (psi)
6.00-9	10 PR	4.00 E	160	540	1450	90
6.50-10	12 PR	5.00 F, 5.50 F	177	588	1650	95
7.00-12	12 PR	5.00 S	192	672	2120	90
8.15-15 (29X8-15)	14 PR	7.0	216	707	3900	85



SIZE & PATTERN

Light Truck	KNK 20	14.9/30	8 PR	Trailer Implement	KNK 48
6.50-14C	8 PR	14.9/30	10 PR	10.0/75-15.3 TL	12 PR
6.50-16C	8 PR	16.9/30	8 PR	11.5/80-15.3 TL	12 PR
6.50-16C	10 PR	16.9/30	10 PR	12.5/80-15.3 TL	12 PR
7.00-16C	8 PR	16.9/30	12 PR	10.5/65-16 TT	10 PR
7.00-16C	10 PR	16.9/30	14 PR	10.5/80-18 TT	10 PR
7.50-16C	8 PR	18.4/30	8 PR	12.5/80-18 TT	14 PR
7.50-16C	10 PR	18.4/30	10 PR	13.0/65-18 TT	14 PR
7.50-16C	12 PR	18.4/30	14 PR	13.0/65-18 TT	16 PR
Light Truck	KNK 24	16.9/34	8 PR	Industrial	IND 80
7.50-16C	10 PR	16.9/34	10 PR	12.5/80-18 TL-TT	12 PR
7.50-16C	12 PR	16.9/34	12 PR	16.0/70-20 TL-TT	14 PR
Light Truck	KNK 25	18.4/34	8 PR	15.5-80-24	14 PR
7.50-16C	8 PR	18.4/34	10 PR	16.0/70-24 TL	14 PR
7.50-16C	10 PR	18.4/34	12 PR	16.9/24 TL	12 PR
7.50-16C	12 PR	12.4/36	8 PR	15.5-25 TL	12 PR
Light Truck	KNK 126	13.6/36	6 PR	18.4/26 TL-TT	14 PR
7.00-16C	8 PR	13.6/36	8 PR	16.9/28 TL-TT	12 PR
7.00-16C	10 PR	13.6/36	8 PR	Industrial	KNK 44
7.50-16C	8 PR	14.0/38	8 PR	10.00-20	16 PR
7.50-16C	10 PR	14.0/38	10 PR	Industrial	KNK 65
7.50-16C	12 PR	15.5/38	8 PR	10-16.5 TL	8 PR
Front / Rear Tractor	KNK 50	15.5/38	10 PR	12-16.5 TL	10 PR
4.50-10	4 PR	16.9/38	8 PR	OTR	KNK 70
5.00-12	4 PR	16.9/38	10 PR	17.5-25 TL	16 PR
6.50/80-12	6 PR	18.4/38	10 PR	17.5-25 TL	20 PR
6.50/80-13	6 PR	Front Tractor	KNK 30	20.5-25 TL	16 PR
7.00-12	6 PR	6.00-16	6 PR	20.5-25 TL	20 PR
5.00-15	6 PR	6.00-16	8 PR	23.5-25 TL	16 PR
6.00-16	6 PR	6.50-16	6 PR	23.5-25 TL	20 PR
6.00-16	8 PR	6.50-16	8 PR	26.5-25 TL	28 PR
6.50-16	6 PR	7.50-16	6 PR	29.5-25 TL	28 PR
7.50-16	8 PR	7.50-16	8 PR	OTR	KNK 72
7.00-18	8 PR	Front Tractor	KNK 35	13.00-24 TT-TL	12 PR
7.50-18	8 PR	5.50-16	6 PR	13.00-24 TT-TL	14 PR
7.50-20	8 PR	6.00-16	6 PR	14.00-24 TT-TL	16 PR
8.3/24	8 PR	7.50-16	6 PR	14.00-24 TT-TL	18 PR
9.5-24	8 PR	7.50-16	8 PR	Forklift	IND 40
11.2/24	8 PR	7.50-18	8 PR	6.00-9	10 PR
12.4/24	8 PR	Front Tractor	KNK 32	6.50-10	12 PR
12.4/24	12 PR	6.50-20	8 PR	7.00-12	12 PR
13.6/24	8 PR	7.50-16	6 PR	8.15-15 (29x8-15)	14 PR
14.9/24	8 PR	7.50-16	8 PR		
14.9/24	10 PR	7.50-20	8 PR		
11.2/28	6 PR	Implement	KNK 25		
11.2/28	8 PR	7.50-16C	10 PR		
12.4/28	6 PR	7.50-16C	12 PR		
12.4/28	8 PR	8.25-20C	14 PR		
13.6/28	6 PR	Implement	KNK 26		
13.6/28	8 PR	9.00-16C	12 PR		
14.9/28	6 PR	9.00-16C	14 PR		
14.9/28	8 PR	Implement	KNK 27		
16.9/28	8 PR	9.00-16C	12 PR		
16.9/28	10 PR	9.00-16C	14 PR		



product catalogue



**“Best price,
prompt delivery”**



**Seha Mühendislik Müşavirlik
Tic. Ve Makina San. Ltd. Şti.**

Ayten Sk. 27/2 Mebusevleri
06580 Ankara - TURKEY

Tel: +90 312 215 75 00 (Pbx)
Fax: +90 312 223 49 78
+90 312 215 75 15

fpolat@seha.com.tr
tyre@seha.com.tr
tire@seha.com.tr
info@seha.com.tr

www.seha.com.tr